

SIRENS, CONTROLLERS & SPEAKER

SAF206™

ProSignal™



DESCRIPTION

- ▶ The SAF206™ can operate up to two 100 Watt speakers. It's a full function light and siren controller.
- ▶ This version is console mount and comes with a hand-held microphone

FEATURES




- ▶ Input voltage 12Vdc
- ▶ Six programmable auxiliary buttons (10A ea.)
- ▶ Three position slide switch (10A ea.)
- ▶ 6 position rotary knob
- ▶ Noise canceling microphone
- ▶ Horn Ring Transfer (HRT) for hands-free siren operation
- ▶ Park Kill input
- ▶ Video Trigger output
- ▶ Tones: Horn, Wail, Yelp, Phaser, Hi-Lo
- ▶ LED backlighting (green OFF, red ON)
- ▶ Comes with a full sheet of selectable icon stickers



ELECTRICAL SPECIFICATIONS

Input Voltage:	10 to 16Vdc
Siren Input Current:	8.5A at 13.6Vdc (single 100W speaker) 16A at 13.6Vdc (dual 100W speakers)
Siren Standby Current:	Less than 300mA
Audio Frequency:	200Hz - 10kHz \pm 3db
Audio Output:	40 watts at 13.6VDC (single 100W speaker)
Siren Output Power:	100 watts RMS max. (14VDC - single 100W speaker) 200 watts RMS max. (14VDC - dual 100W speakers)
Siren Frequency:	725Hz - 1465Hz
Operating Temperature:	-30°C to 65°C

DIMENSIONS

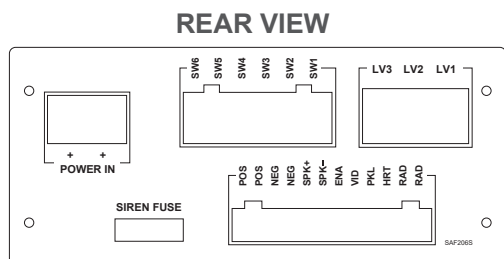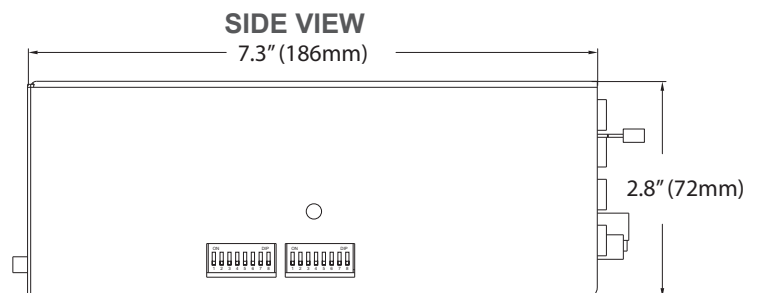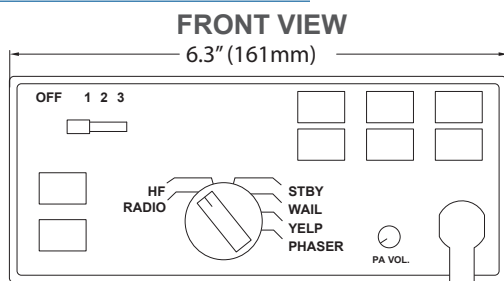

PRODUCT NUMBERS

Number	Description
80002Z	PROSIGNAL - AMPLIFIER CONSOLE MOUNT + HAND-HELD MIC - 100W/200W