

## PERIMETER LIGHTING

# MS26BS


**ProSignal™**



## DESCRIPTION

- ▶ The MS Series is still on the top step of the podium. Its legendary reliability is no secret for anyone.
- ▶ Its design meets SAE J845 Class I standards.

## FEATURES

- ▶ Multi-voltage input: 12 to 24Vdc
- ▶ 25 flash patterns
- ▶ High intensity LED modules (12 LED modules of 1 Watt)
- ▶ LEDs rated to 100 000 hours of operation
- ▶ Non-volatile memory recalls last flash pattern used at power up
- ▶ Weatherproof and vibration resistant design for internal or external use
- ▶ Reverse polarity protection
- ▶ Multiple units can be synchronized
- ▶ Color available: 



## ELECTRICAL SPECIFICATIONS

|                           |   |
|---------------------------|---|
| <b>Operating Voltage:</b> | 12 to 24Vdc                                   |
| <b>Maximum Current:</b>   | 2.5A at 12Vdc / 1.25A at 24Vdc                |
| <b>Average Power:</b>     | 15 Watts at 12Vdc (varies with flash pattern) |
| <b>Maximum Power:</b>     | 30 Watts                                      |
| <b>Fuse Recommended:</b>  | 5A  |


## CONNECTING OPTIONS



## FLASHING MODES



## DIMENSIONS

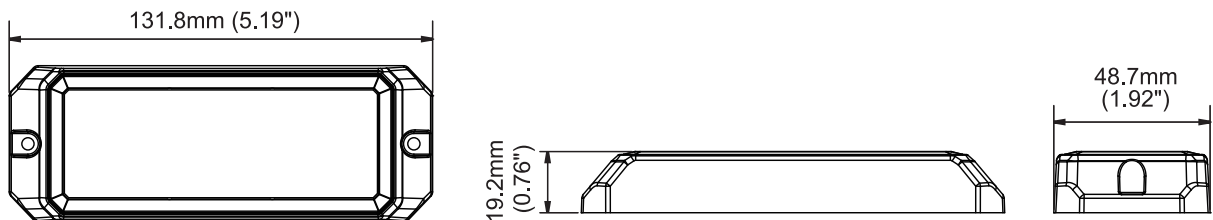

## PRODUCT NUMBERS

| Number | Description                                      |
|--------|--|
| 21103Z | PROSIGNAL - MS26 - 12 LED SURFACE/MT - AMBER     |
| 21102Z | PROSIGNAL - MS26 - 12 LED SURFACE/MT - RED       |
| 21105Z | PROSIGNAL - MS26 - 12 LED SURFACE/MT - BLUE      |
| 21106Z | PROSIGNAL - MS26 - 12 LED SURFACE/MT - RED/WHITE |