

# SAF205™



## DESCRIPTION

- ▶ The SAF205™ can operate up to two 100 Watt speakers. It's a full function light and siren controller.
- ▶ This version comes with a hand-held controller

## FEATURES


- ▶ Input voltage 12Vdc
- ▶ Four programmable auxiliary buttons (10A ea.)
- ▶ Programmable three button primary lighting set up (10A ea.)
- ▶ Noise canceling microphone
- ▶ Horn Ring Transfer (HRT) for hands free siren operation
- ▶ Park Kill input
- ▶ 6' extension cable for HH controller
- ▶ Tones: Horn, Wail, Yelp, Phaser, Hi-Lo
- ▶ LED backlighting (green OFF, red ON)
- ▶ Comes with a full sheet of selectable icon stickers



## ELECTRICAL SPECIFICATIONS

<b>Input Voltage:</b>	10 to 16Vdc
<b>Siren Input Current:</b>	8.5A at 13.6Vdc - single 100W speaker] 16A at 13.6Vdc - dual 100W speakers]
<b>Siren Standby Current:</b>	Less than 150mA
<b>Audio Frequency:</b>	200Hz - 10kHz $\pm$ 3db
<b>Audio Output:</b>	40 watts at 13.6VDC-single 100W speaker]
<b>Siren Output Power:</b>	100 watts RMS max. [ 14VDC - single 100W speaker] 200 watts RMS max. [ 14VDC - dual 100W speakers]
<b>Siren Frequency:</b>	725Hz - 1465Hz
<b>Operating Temperature:</b>	-25°C to 60°C

## DIMENSIONS

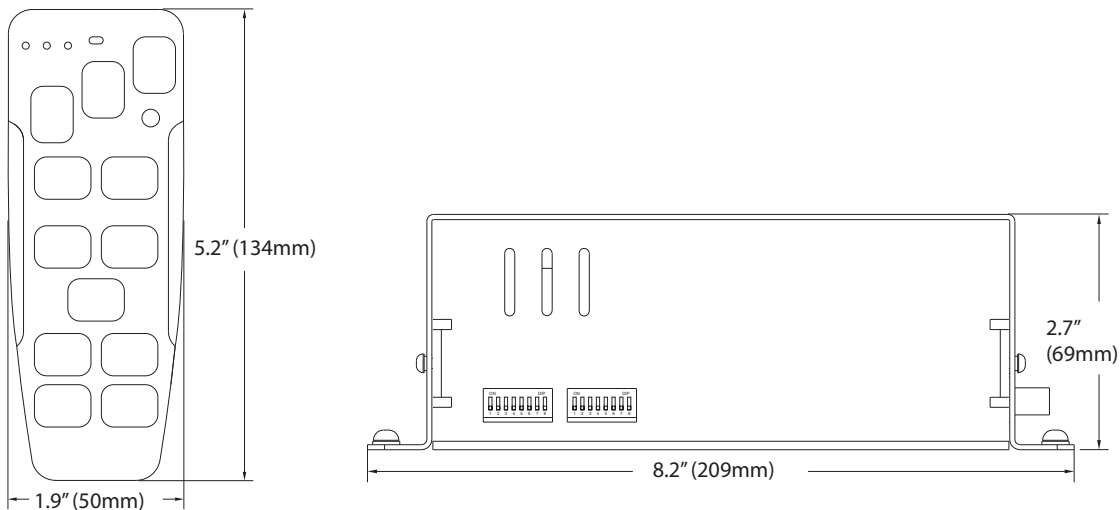

## PRODUCT NUMBERS

Number	Description
80001Z	PROSIGNAL - AMPLIFIER + HAND-HELD CONTROLLER - 100W/200W