

PERIMETER LIGHTING

MS3BS





ProSignal™



DESCRIPTION

- The MS Series is still on the top step of the podium. Its legendary reliability is no secret for anyone.
- Its design meets SAE J845 Class I standards.

FEATURES

- Multi-voltage input: 12 to 24Vdc
- 12 flash patterns
- High intensity LED modules (3 LED modules of 1 Watt)
- LEDs rated to 100 000 hours of operation
- Non-volatile memory recalls last flash pattern used at power up
- Weatherproof and vibration resistant design for internal or external use
- Offers various mounting brackets
- Reverse polarity protection
- Multiple units can be synchronized
- Color available:    



ELECTRICAL SPECIFICATIONS


Operating Voltage:	12 to 24Vdc
Maximum Current:	0.4A at 12Vdc / 0.22A at 24Vdc
Average Power:	2.7 Watts at 12Vdc [varies with flash pattern]
Maximum Power:	5.5 Watts
Fuse Recommended:	1A

CONNECTING OPTIONS



DIMENSIONS

Surface Mount

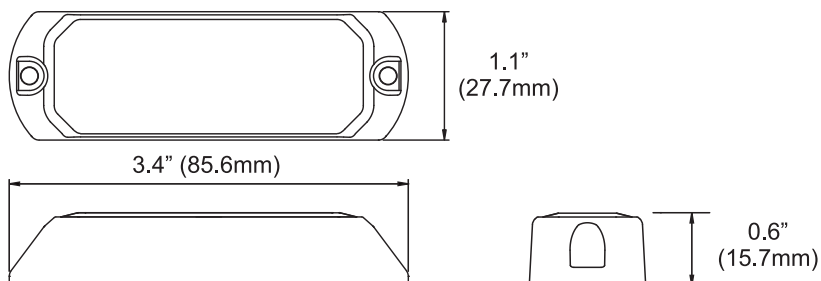

PRODUCT NUMBERS

Number	Description
21003Z	PROSIGNAL - MS3 - 3 LED SURFACE/MT - AMBER
21002Z	PROSIGNAL - MS3 - 3 LED SURFACE/MT - RED
21005Z	PROSIGNAL - MS3 - 3 LED SURFACE/MT - BLUE
21001Z	PROSIGNAL - MS3 - 3 LED SURFACE/MT - WHITE
92102Z	PROSIGNAL - MS3 - DOUBLE BRACKET - VERTICAL
92101Z	PROSIGNAL - MS3 - DOUBLE BRACKET - VERTICAL
92003Z	PROSIGNAL - MS3 - LICENSE PLATE BRACKET - HORIZONTAL