MS6BS

ProSigna1™







DESCRIPTION

- The MS Series is still on the top step of the podium. Its legendary reliability is no secret for anyone.
- Its design meets SAE J845 Class I standards.

FEATURES

- Multi-voltage input: 12 to 24Vdc
- ▶ 19 flash patterns
- ▶ High intensity LED modules (6 LED modules of 1 Watt)
- LEDs rated to 100 000 hours of operation
- Non-volatile memory recalls last flash pattern used at power up
- ▶ Weatherproof and vibration resistant design for internal or external use
- Offers various mounting brackets
- ▶ Reverse polarity protection
- Multiple units can be synchronized
- Color available:




























ELECTRICAL SPECIFICATIONS

Operating Voltage:	12 to 24Vdc
Maximum Current:	1.15A at 12Vdc / 0.58A at 24Vdc
Average Power:	6.9 Watts at 12Vdc (varies with flash pattern)
Maximum Power:	13.8 Watts
Fuse Recommended:	3A

DIMENSIONS

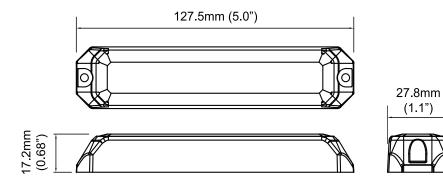

PRODUCT NUMBERS

Number	Description
21203Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - AMBER
21202Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - RED
21205Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - BLUE
21201Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - WHITE
21206Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - RED/WHITE
21208Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - AMBER/WHITE
21207Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - RED/BLUE
21209Z	PROSIGNAL - MS6 - 6 LED SURFACE/MT - BLUE/WHITE
91001Z	PROSIGNAL - MS6 - (L) BRACKET - HORIZONTAL
91000Z	PROSIGNAL - MS6 - (L) DOUBLE BRACKET - HORIZONTAL
91101Z	PROSIGNAL - MS6 - BRACKET - VERTICAL
91003Z	PROSIGNAL - MS6 - ADJUSTABLE ANGLE BRACKET - HORIZONTAL
91002Z	PROSIGNAL - MS6 - LICENSE PLATE DOUBLE BRACKET - HORIZONTAL