


ECONOMIC 66106Z



LIGHT PATTERN



66106Z


Number Description

66106Z LED LIGHTBAR 22" STRAIGHT - 12595 LM - POSITION LIGHTS/DRL - COMBO BEAM

66136Z LED LIGHTBAR 32" STRAIGHT - 14083 LM - POSITION LIGHTS/DRL - COMBO BEAM


66100Z HARNESS FOR LED LIGHTBAR 22" & 32" WITH 2 ON/OFF SWITCH

Combo Beam

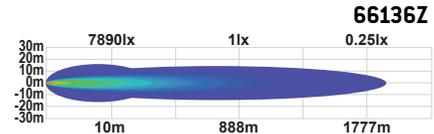


66136Z

66106Z

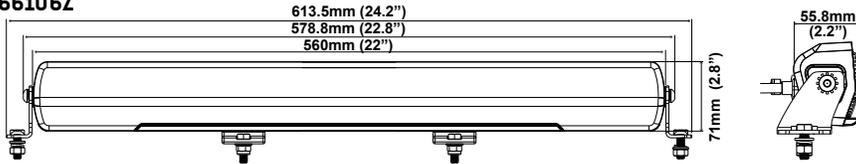

66136Z

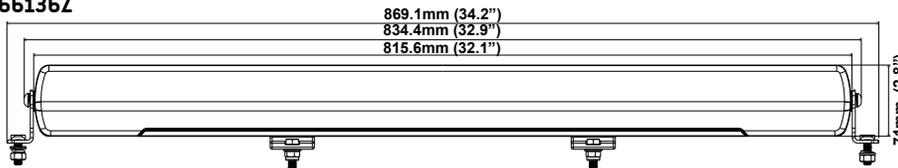

ELECTRICAL SPECIFICATIONS


Voltage: 12Vdc at 24Vdc

Current: 16.2A at 12Vdc / 7.8A at 24Vdc (66106Z)
21.4A at 12Vdc / 10.5A at 24Vdc (66136Z)

Lumen: 12 595 (66106Z)
14 083 (66136Z)

Color Temperature: 5700K (66106Z)
5000K (66136Z)


Service Life: 50 000 Heures

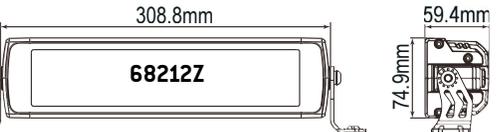


Number Description

68212Z LED LIGHTBAR 12" STRAIGHT - 12280 LM - FLOOD BEAM

68202Z LED LIGHTBAR 20" STRAIGHT - 24560 LM - FLOOD BEAM

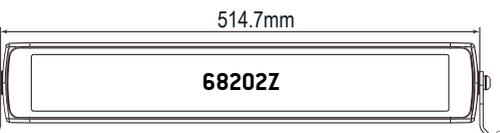

LIGHT PATTERN

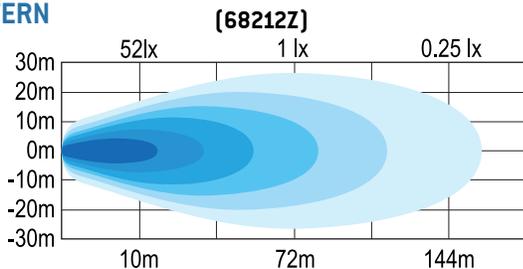

{68212Z}

Flood Beam

ELECTRICAL SPECIFICATIONS

Voltage: 12Vdc to 24Vdc

Current: 8.2A at 12Vdc / 4.1A at 24Vdc (68212Z)
16.4A at 12Vdc / 8.2A at 24Vdc (68202Z)

Lumen: 12,280 (68212Z)
24,560 (68202Z)

Color Temperature: 5700K

Operating Temperature: -30°C to 65°C