



B22 DIN POLE



Numéro	Description
 77923Z	BEACON B22- 16-LED DIN-POLE - AMBER
77xxxZ-DIN-2	MOUNTING STEM - DIN POLE/BEACON



ELECTRICAL SPECIFICATIONS

Voltage: 12Vdc to 24Vdc

Max. Current: 2.45A at 12Vdc / 1.37A at 24Vdc

Avg. Current: 2.1A at 1.2Vdc / 0.84A at 24Vdc
[Varies with pattern]

Flash Patterns: 12

Service Life: 50 000 Heures






77xxxZ-DIN-2

B22 LOW PROFILE



Numéro	Description
 77903Z	BEACON B22 - 16-LED PERMANENT/MT - AMBER
 77913Z	BEACON B22 - 16-LED MAGNETIC/MT - AMBER

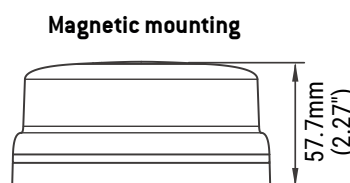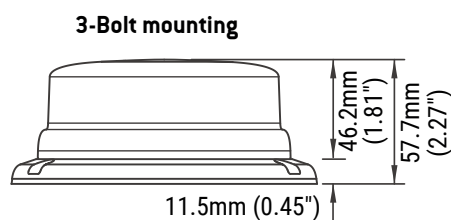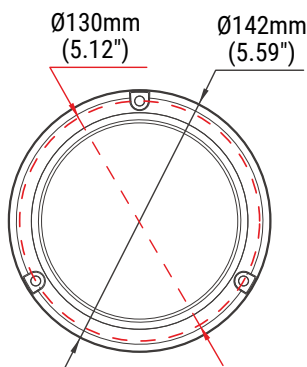

ELECTRICAL SPECIFICATIONS

Voltage: 12Vdc to 24Vdc

Max. Current: 2.45A at 12Vdc / 1.37A at 24Vdc

Avg. Current: 2.1A at 1.2Vdc / 0.84A at 24Vdc
[Varies with pattern]

Flash Patterns: 12

Service Life: 50 000 Heures

