



High dome / amber lens






Low dome / clear lens

DESCRIPTION

- ▶ Offering the perfect combination of power at the right price, the Fiery™ strobe Lightbar breathes new life into traffic signs. Also available in a High Dome version for larger machinery.
- ▶ This product meets SAE J845 Class 1 standards.

FEATURES


- ▶ Multi-voltage input: 12 to 24Vdc
- ▶ 21 selectable flash patterns
- ▶ Low dome: 9 LED of 1 watt per module / High dome: 18 LED of 1 watt per module (6 modules)
- ▶ Low power function for night time use
- ▶ Non-volatile memory recalls last flash pattern used at power up
- ▶ Weatherproof and vibration resistant design for internal or external use
- ▶ Available in permanent or magnetic mount
- ▶ Reverse polarity protection
- ▶ Low or high dome available
- ▶ Multiple units can be synchronized
- ▶ LED Color available: 
- ▶ Lens Color available:  

ELECTRICAL SPECIFICATIONS

Operating Voltage:	12Vdc to 24Vdc
Maximum Draw:	1.8A at 12Vdc / 0.9A at 24Vdc (Low dome) 2.6A at 12Vdc / 1.3A at 24Vdc (High dome)
Maximum Power:	22 Watts (Low dome) 44 Watts (High dome)
Fuse Recommended:	5A

*Consumption in Steady-On mode.

DIMENSIONS

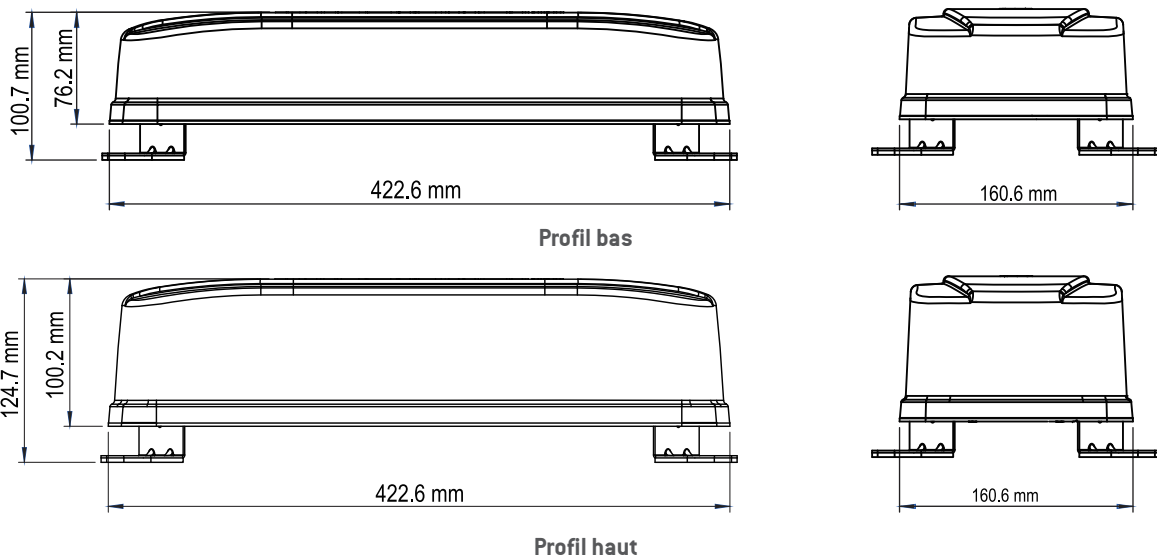

PRODUCT NUMBERS

Number	Description
96613Z	PROSIGNAL - FIERY - LOW DOME PERMANENT/MT 12V-24V - AMBER / CLEAR LENS
96013Z	PROSIGNAL - FIERY - LOW DOME MAGNETIC/MT 12V-24V - AMBER / CLEAR LENS
96603Z	PROSIGNAL - FIERY - LOW DOME PERMANENT/MT 12V-24V - AMBER / AMBER LENS
96003Z	PROSIGNAL - FIERY - LOW DOME MAGNETIC/MT 12V-24V - AMBER / AMBER LENS
96663Z	PROSIGNAL - FIERY - HIGH DOME PERMANENT/MT 12V-24V - AMBER / CLEAR LENS
96063Z	PROSIGNAL - FIERY - HIGH DOME MAGNETIC/MT 12V-24V - AMBER / CLEAR LENS
96633Z	PROSIGNAL - FIERY - HIGH DOME PERMANENT/MT 12V-24V - AMBER / AMBER LENS
96033Z	PROSIGNAL - FIERY - HIGH DOME MAGNETIC/MT 12V-24V - AMBER / AMBER LENS
78103Z	PUMP VACUUM SUCTION CUP (1X)
ZT-0459-001	FIERY - BRACKETS FOR (2x) PUMP VACUUM SUCTION