

FL1 LED



ELECTRICAL SPECIFICATIONS

Voltage: 10Vdc to 18Vdc

Max. Current: 4.8A at 12Vdc (40 LED) / 7.2A at 12Vdc (60 LED)



Avg. Current: 2.4A at 12Vdc (40 LED) / 3.6A at 12Vdc (60 LED)

Operating Temperature: -40°C to 75°C (-40°F to 167°F)

- Robust power cable with flexible sheath for easy installation (20, 40, 50 or 60 feet).
- Model with 40 or 60 LEDs with 14 or 15 lamps.
- Stable light intensity over a range of 10 to 18Vdc.

Number	Description
FL1-L21220	14x 40-LED ARROW BOARD (HALF SUN-VISOR) - 20 FEET CABLE
FL1-L21240	14x 40-LED ARROW BOARD (HALF SUN-VISOR) - 40 FEET CABLE
FL1-L21260	14x 40-LED ARROW BOARD (HALF SUN-VISOR) - 60 FEET CABLE
FL2-L21220	15x 40-LED ARROW BOARD (HALF SUN-VISOR) - 20 FEET CABLE
FL2-L21240	15x 40-LED ARROW BOARD (HALF SUN-VISOR) - 40 FEET CABLE
L2	40 LED LAMP + HALF SUN-VISOR FOR ARROW BOARD - AMBER
CTRL-FL1	ARROW BOARD CONTROLLER
INTEGRA-BASIC-KIT-01	INTEGRA-BASIC KIT - KEYPAD 01 (ARROW & ACCESSORIES)

*15 Lamp Model Available

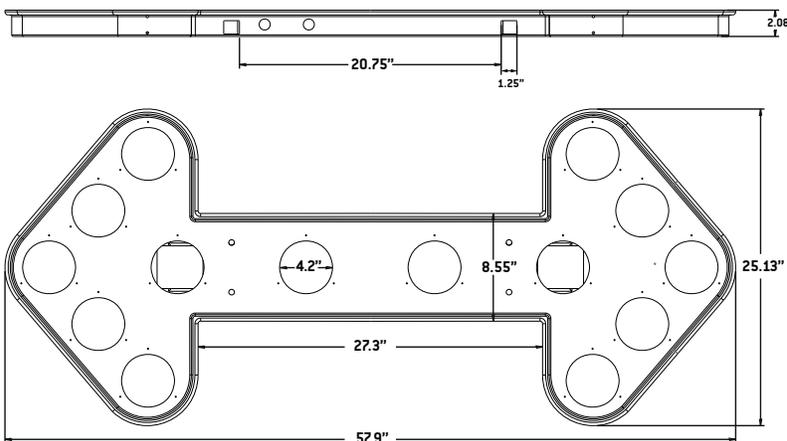

L2



Photocell

CTRL-FL1

