



Integrated PL3 female socket




Models
20689Z & 20489Z


Number	Description
20649Z	OVAL GROMMET MOUNT LIGHT 6" STT+R & STROBE - AMBER/BLUE
20648Z	OVAL GROMMET MOUNT LIGHT 6" STT+R & STROBE - AMBER/GREEN
20449Z	ROUND GROMMET MOUNT LIGHT 4" STT+R & STROBE - AMBER/BLUE
20448Z	ROUND GROMMET MOUNT LIGHT 4" STT+R & STROBE - AMBER/GREEN
20689Z	HEATED OVAL GROMMET MOUNT LIGHT 6" STT+R & STROBE - AMBER/BLUE
20489Z	HEATED ROUND GROMMET MOUNT LIGHT 4" STT+R & STROBE - AMBER/BLUE

- Built-in functions: Position Lights, Stop, Flasher, Reverse, and Strobe (2 colors)
- Vertical or horizontal mounting (SAE J595 Class 1 Compliant)
- Integrated PL3 female socket
- Lens that resists UV rays and yellowing
- High shock and vibration resistance
- Self-heating lens prevents snow and ice buildup (models 20689Z & 20489Z)

20689Z & 20489Z
Ice and snow accumulate



Ice and snow melt thanks to the self-heating element in the lens

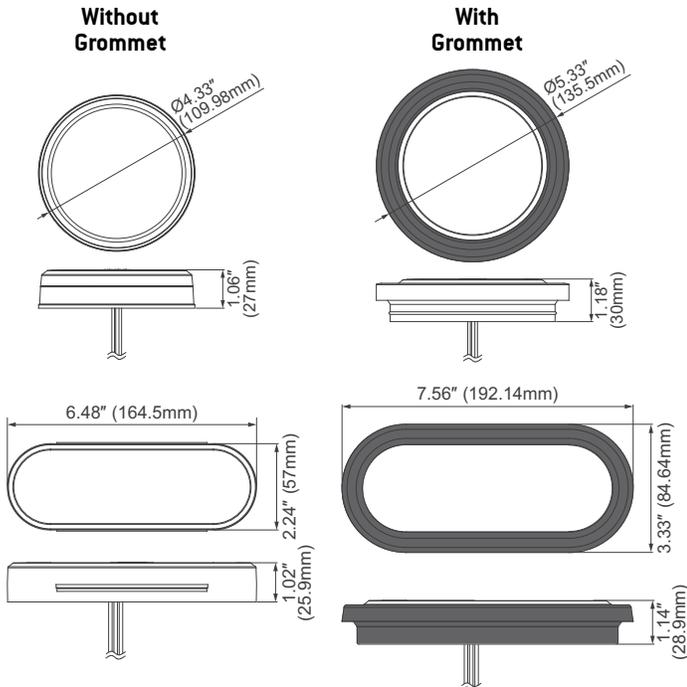

ELECTRICAL SPECIFICATIONS

Voltage: 12Vdc at 24Vdc

Max. Current: 1.64A at 12Vdc / 0.85A at 24Vdc [20449Z & 20448Z]
2.14A at 12Vdc / 1.07A at 24Vdc [20649Z & 20648Z]
2.66A at 12Vdc / 1.36A at 24Vdc [20489Z]
3.34A at 12Vdc / 1.67A at 24Vdc [20689Z]

Avg. Current: 0.82A at 12Vdc / 0.43A at 24Vdc [20449Z & 20448Z]
1.07A at 12Vdc / 0.54A at 24Vdc [20649Z & 20648Z]
1.33A at 12Vdc / 0.68A at 24Vdc [20489Z]
1.67A at 12Vdc / 0.84A at 24Vdc [20689Z]
[Varies with pattern]

Flash Patterns: 17