


LP3



DESCRIPTION

- ▶ Fully waterproof, the super thin LP3™ module can be installed in any location. It is ideal for installations requiring the utmost discretion. They are the most economical strobe led module in their category.
- ▶ Its design meets SAE J845 Class I standards.


FEATURES

- ▶ Multi-voltage input: 12 to 24Vdc
- ▶ 12 flash patterns
- ▶ High intensity LED modules (3 LED modules of 1 Watt)
- ▶ LEDs rated to 100 000 hours of operation
- ▶ Non-volatile memory recalls last flash pattern used at power up
- ▶ Weatherproof and vibration resistant design for internal or external use
- ▶ Reverse polarity protection
- ▶ Multiple units can be synchronized
- ▶ Color available: 

ELECTRICAL SPECIFICATIONS

Operating Voltage:	12 to 24Vdc
Maximum Current:	0.54A at 12Vdc / 0.27A at 24Vdc
Average Power:	3.25 Watts at 12Vc (Varies according to signal symbol)
Maximum Power:	6.25 Watts
Fuse Recommended:	1A

DIMENSIONS

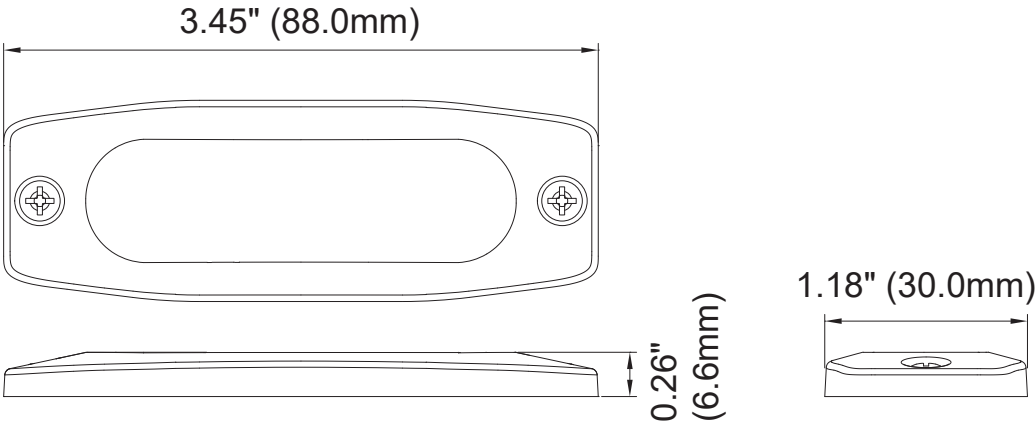

PRODUCT NUMBERS

Number	Description
25003Z	PROSIGNAL - LP3 - 3 LED SURFACE MOUNT - AMBER