### PERIMETER LIGHTING

## ProSigna1™

# AL6



**Surface Mount** 



**Mirror Mount** 



#### DESCRIPTION

- ▶ The AL6<sup>™</sup> can be installed either under the mirrors or on the surface of the vehicle. Make sure to specify the application during the purchase process.
- ▶ Its design provides a powerful illumination on 180° and exceeds SAE J845 Class I standards.


#### **FEATURES**

- Multi-voltage input: 12 to 24Vdc
- 16 flash patterns
- High intensity LED modules (6 LED modules of 1 Watt)
- LEDs rated to 100 000 hours of operation
- Non-volatile memory recalls last flash pattern used at power up
- > Weatherproof and vibration resistant design for internal or external use
- Reverse polarity protection
- Multiple units can be synchronized
- Color available: Color ava

#### **ELECTRICAL SPECIFICATIONS**

Operating Voltage:	12 to 24Vdc
Maximum Current:	1.14A at 12Vdc / 0.57A at 24Vdc
Average Power:	6.84 Watts (varies with flash pattern)
Maximum Power:	13.7 Watts
Fuse Recommended:	2A

#### DIMENSIONS

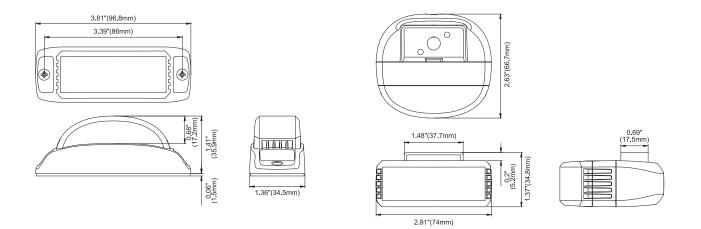

#### **PRODUCT NUMBERS**

Number	Description
24013Z	PROSIGNAL - AL6 - 6 LED SURFACE/MT - AMBER
24012Z	PROSIGNAL - AL6 - 6 LED SURFACE/MT - RED
24015Z	PROSIGNAL - AL6 - 6 LED SURFACE/MT - BLUE
24011Z	PROSIGNAL - AL6 - 6 LED SURFACE/MT - WHITE
24003Z	PROSIGNAL - AL6 - 6 LED MIRROR/MT - AMBER
24002Z	PROSIGNAL - AL6 - 6 LED MIRROR/MT - RED
24005Z	PROSIGNAL - AL6 - 6 LED MIRROR/MT - BLUE